

PP 2-32/100

PNEUMATIC DOVETAIL ROUTING MACHINE




Free-standing version with solid cast table and large working surface at a comfortable working height. With four router units which router two work-piece on each machine cycle, each with two dovetail slots, for Hoffmann Key sizes W-1/2/3/4. Finely adjustable router spindle centres from 32 mm to 100 mm.

Function

The automatic machine cycle is actuated by pressing the foot-pedal. The positioned work-piece is clamped and the units rout to the pre-set depth and then return to their home position. The work-piece is then released. The centre-fence and the routing depth are selected manually. The router cross-centres are positioned manually with the aid of a lead screw and digital counter.

Technical data

Electric power	3ph/N/PE 230/400 V 50/60Hz 4.0 kW
Pneumatic	6 bar
Motors	4 x 1000 W
Motor speed	34.000 1/min.
Control	pneumatisch
Clamping	pneumatisch
Work-piece height	210 mm
Router depth	0 - 115 mm
Extraction port	Ø 100 mm
Hoffmann Key sizes	W 1 / 2 / 3
Dimensions W/D/H	1000 / 750 / 1500 mm
Weight	215 kg
Order No.	W 108 3000

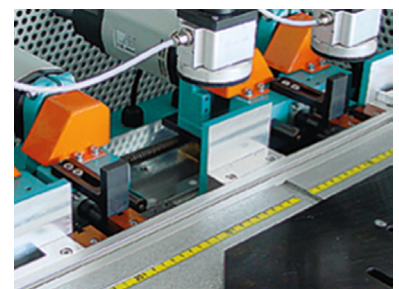

Router Units

Technical changes without notice.



Hoffmann GmbH Maschinenbau

Mergelgrube 5 · 76646 Bruchsal (Germany)
Phone +49 7251 9544-0 · Fax +49 7251 9544-44
info@hoffmann-schwalbe.de · www.hoffmann-schwalbe.de

