

# PP 2

## PNEUMATIC DOVETAIL ROUTING MACHINE




Free-standing version with solid cast table and large working surface at a comfortable working height. With two stations comprising of a single router. Routing two dovetail slots (one in each work-piece) with each machine cycle Hoffmann Key sizes W-1/2/3. Option W-4 .

### Function

The automatic machine cycle is actuated by pressing the foot-pedal. The positioned work-piece is clamped and the units router to the pre-set depth and then return to their home position. The work-piece is then released.

### Technical data

Electrical	3ph/N/PE 230/400 V 50/60Hz 2.0 kW
Pneumatic	6 bar
Motors	2 x 1000 W
Motor speed	34.000 1/min.
Control	pneumatisch
Clamping	pneumatisch
Work-piece height	150 mm
Router depth	0 - 115 mm
Extraction port	Ø 100 mm
Hoffmann Key sizes	W 1 / 2 / 3 / (4 optional)
Dimensions W/D/H	1000 / 750 / 1500 mm
Weight	158 kg
Order No.	W 108 0000

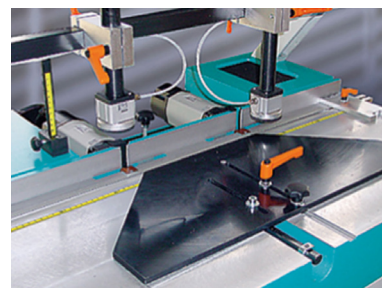

Technical changes without notice.



### Hoffmann GmbH Maschinenbau

Mergelgrube 5 · 76646 Bruchsal (Germany)  
Phone +49 7251 9544-0 · Fax +49 7251 9544-44  
info@hoffmann-schwalbe.de · www.hoffmann-schwalbe.de

