
MU 3 H

HORIZONTAL, MANUAL DOVETAIL ROUTING MACHINE

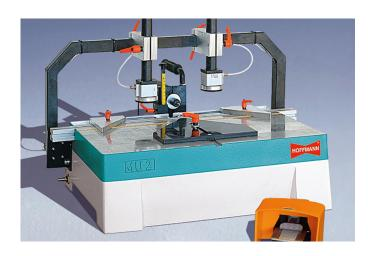

Portable and flexible bench-top machine to router a single horizontal dovetail slot per machine cycle. Dovetail key sizes W-1/2/3/4.

Function

The work-piece is positioned against the centre-fence and the routing length (left & right) is set. By pressing the pneumatic footpedal the work-piece is clamped. The motor is switched on manually and the motor unit is drawn to the set router length. When the part is route-red the unit is brought to the middle position, motor switched off and the workpiece is removed after releasing the footpedal.

Technical data

Power supply	1ph/N/PE 230V 50/60Hz 1.0 kW
Pneumatic	6 Bar
Motor	1 x 1000 W
Rotation speed without load	34.000 1/min.
Control	manual
Work-piece clamping	Pneumatic
Height capacity	110 mm
Routing depth	H 0-80 / L 0-250 mm
Hoffmann Key sizes	W 1 / 2 / 3 / 4
Dimensions W/D/H	700 / 600 / 00 mm
Weight	33 kg
Order No.	W102 3000

Technical changes without notice.





Mergelgrube 5 · 76646 Bruchsal (Germany) Phone +49 7251 9544-0 · Fax +49 7251 9544-44 info@hoffmann-schwalbe.de · www.hoffmann-schwalbe.de

