


X-Line 20

MANUAL DOVETAIL ROUTING MACHINE

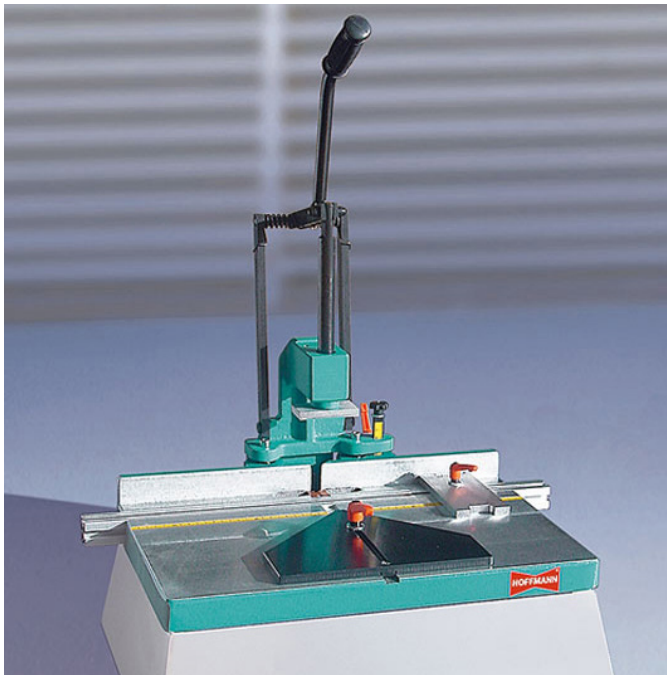

Portable and flexible bench-top machine, for routing a single dovetail slot with each machine cycle. Hoffmann Key sizes W-1/2/3/. Most of the relevant accessories can be used on this machine. Option: Twin version with a double spindle gearbox to produce two dovetail slots per machine cycle.

Function

Position the work-piece on the centre-fence and move according to the profile width. Pull down the handle to clamp the work-piece. Continued pressure raises the router carriage to the pre-set depth. When the handle is returned, the carriage lowers to its home position and the work-piece is released. The motor switches on and off automatically.

Technical data

Power supply	1ph/N/PE 230 V, 50/60Hz 0.5 kW
Motor	1 x 530 W
Motor speed	29.000 1/min.
Control	manual
Work-piece clamping	manual
Height capacity	110 mm
Routing depth	0 - 80 mm
Extraction port size	Ø 60 mm
Hoffmann Key sizes	W 1 / 2 / 3
Dimensions W/D/H	600 / 540 / 770 mm
Weight	19 kg
Order No.	W100 0200

Technical changes without notice.



Hoffmann GmbH Maschinenbau

Mergelgrube 5 · 76646 Bruchsal (Germany)
Phone +49 7251 9544-0 · Fax +49 7251 9544-44
info@hoffmann-schwalbe.de · www.hoffmann-schwalbe.de

